



Security Gateways

UTM-1 Appliance—Model 272

OVERVIEW

UTM-1™ appliances offer the ideal combination of proven security technologies and easy-to-use deployment and management features. With a full line of hardware-based solutions, Check Point UTM-1 appliances consolidate key security applications such as firewall, VPN, intrusion prevention, and antivirus and more into a single, easy-to-manage solution.

UTM-1 Appliances are based on the Check Point Software Blade Architecture that enables flexible and fast deployment of additional security capabilities, such as VoIP protections, without the addition of new hardware.

BASE CONFIGURATION:


- 4 ports of 10/100/1000Base-T (10/100/1000 Mbps Ethernet) – Copper
- Console port
- Hard Drive 160GB
- Entry-level 2 gateway blades: Firewall, IPSec VPN
- 3 management blades package Network Policy Management, Endpoint Policy Management and Logging & Status
- Recommended for up to 125 users
- 600,000 concurrent connections
- Enclosure 1U

Note: Performance data represents the maximum capabilities of the systems as measured under optimal testing conditions.

BENEFITS

- Industry-leading application- and network-layer firewall
- Site-to-site and remote-access VPNs
- Gateway antivirus and anti-spyware
- Intrusion prevention with type-based protections and security updates
- Web security with URL filtering and integrated security for Web applications
- Email security and anti-spam, including the Check Point six dimensions of comprehensive messaging security
- Software Blade Architecture for fast and flexible deployment of new security services



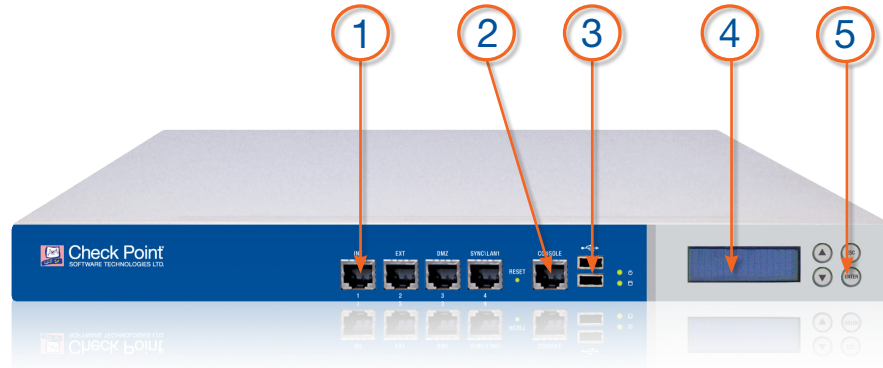

1. 4 x 10/100/1000 Ports
2. Console Port
3. USB Ports
4. LCD Panel
5. LCD Panel Controls

TECHNICAL SPECIFICATIONS

LAN Support

- 1000Base-T (10/100/1000 Mbps Ethernet) – Copper

Hard Disk Configuration

- 1 X 160 GB HDD

Performance

- Firewall – 2.5 Gbps
- VPN – 300Mbps
- IPS – 1.7 Gbps

Note: Performance data represents the maximum capabilities of the systems as measured under optimal testing conditions.

Dimensions

- Standard: 16.8 x 10 x 1.73 in..
- Metric: 429 x 255 x 44mm
- Weight: 3.7kg (8.1lbs)

Power Requirements

- AC Input Voltage: 100-240V
- Frequency: 50/60Hz
- Power Supply Maximum: 65W
- Power Consumption Maximum: 41.1W

Environment Operating Conditions

- Temperature: 41°-104°F/5°-40°C
- Altitude: 8196ft, 2,500 m
- Humidity: 10%-85% (Non-Condensing)

Compliance

- Safety: UL60950-1, First Edition: 2003, CAN/CSAC22.2, No 60950:2000, IEC60950-1: 2001, EN60950-1:2001+A11 with Japanese National Deviations
- Emission Compliance:
 - FCC Part 15, Subpart B, Class A
 - EN50024, EN55022A:1998, CISPR 22 Class A
 - 1985, EN61000-3-2, EN61000-3-3
- Immunity: EN55024: 1998

CONTACT CHECK POINT

Worldwide Headquarters

5 Ha'Solelim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

U.S. Headquarters

800 Bridge Parkway, Redwood City, CA 94065 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com